


Proximity sensor QP-61K

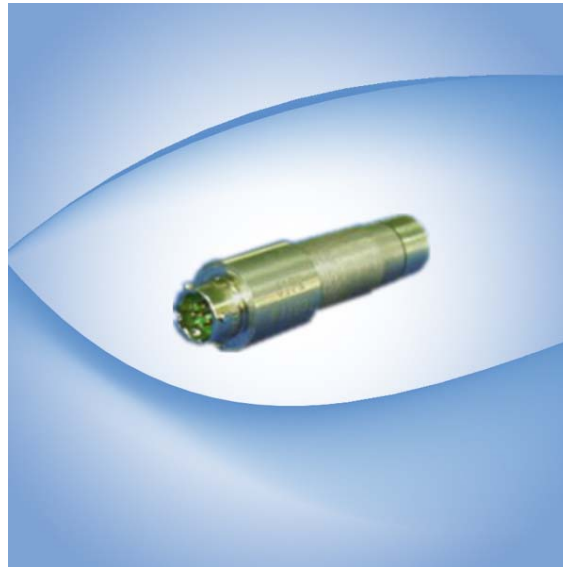

QP-61K is all metal seal structured proximity sensor. With Integrated circuit , It is used to detect the positional variations of metal(target),and output switch signal. Have the characteristics of high precision, good stability, long working life,small in size. Typically applicated in hatch door, folding wing...

Technical Specifications:

Dimension	$\Phi 19 \times 62$
Excitation voltage	18~30 Vdc
Rated detection distance	2mm
Effective detection distance	$\geq 1.5\text{mm}$
Reset distance	$\leq 2.5\text{mm}$
Current consumption	$\leq 20\text{mA}$
Output control current	$\leq 20\text{mA}$
Operating temp.	-55~70°C

QY Electronic Co Ltd

Address: No. 1032, Xinghan Road, Hantai District, Hanzhong, Shaanxi, China (Mainland)

Website: www.qysensor.com

TEL: +86-(0)916-2257989

E-mail: info@qysensor.com

Zip: 723000